




3N 400V AC 50 Hz - 16A



1N 230V AC 50 Hz - 32A



3 230V AC 50 Hz - 16A

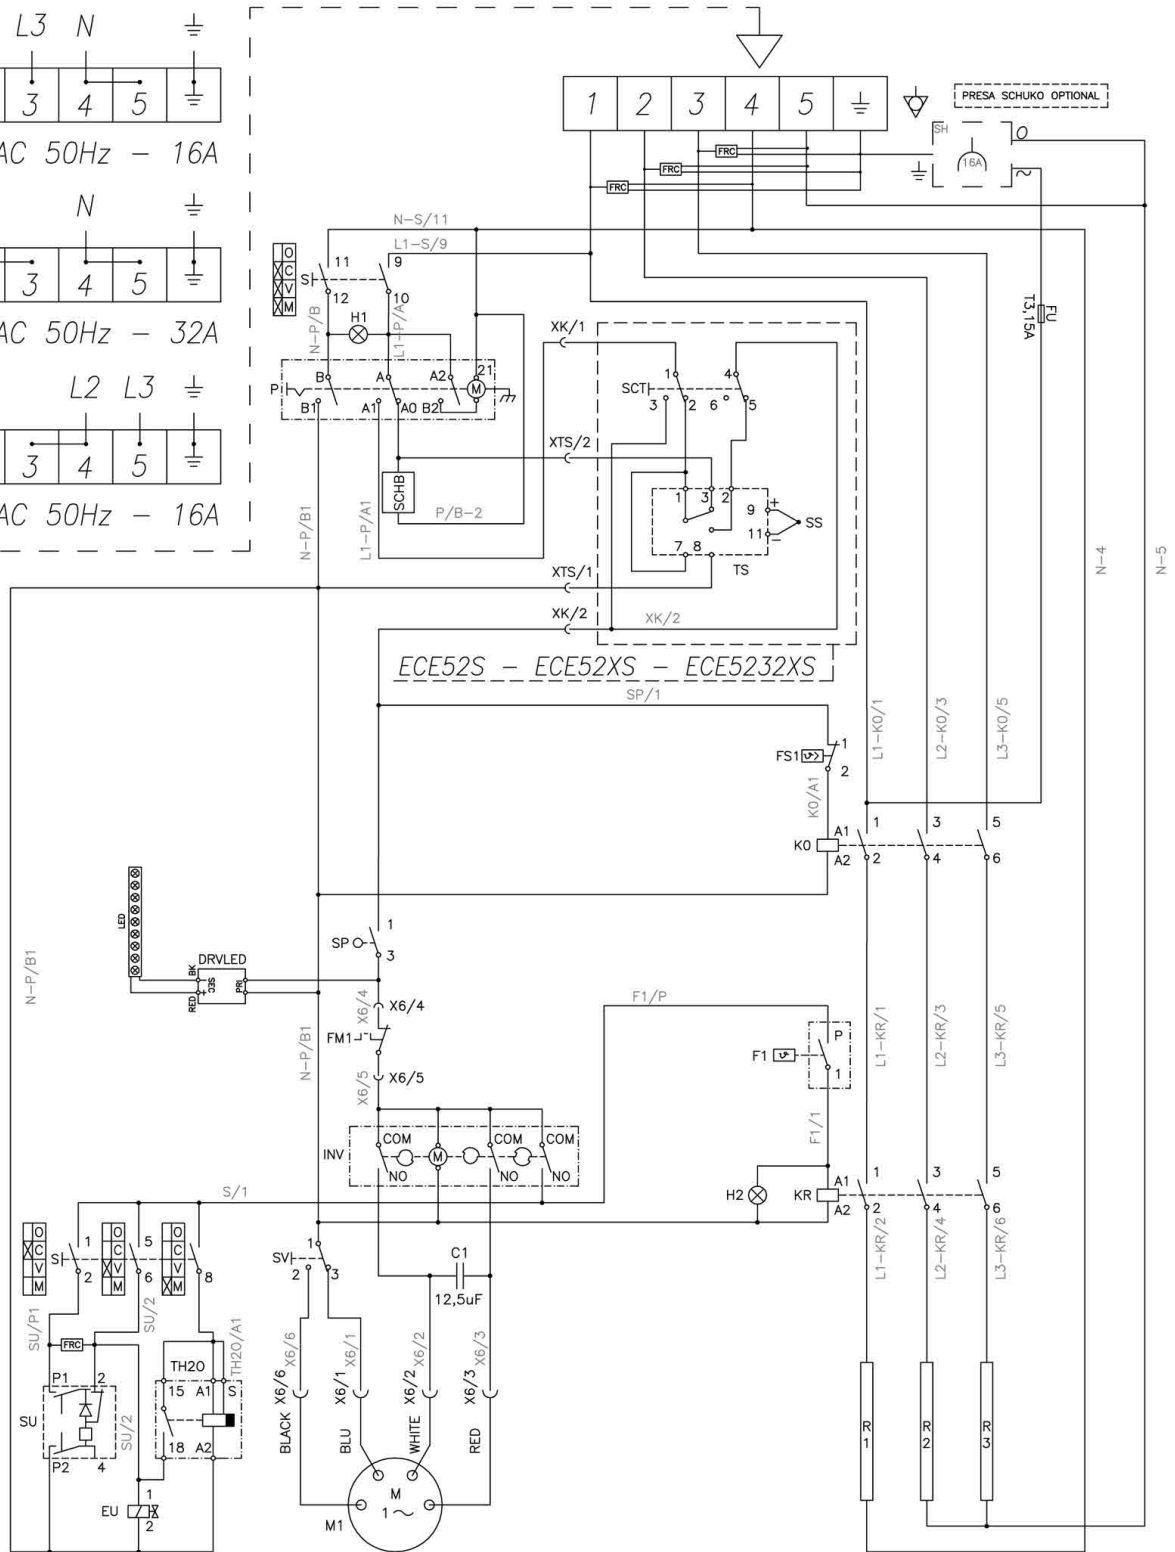

REV.	DESCRIZIONE	DATA	FIRME	APPARECCHIO ECE5232X(S) ECE52(S) - ECE52X(S)		SCHEMA ZSE2242			
C	AGGIUNTE LUCI A LED	09.09.20	ROLDO	RES. ECE5232X(S) RES. ECE52(S) RES. ECE52X(S)	4,5 kW 6 kW 7,35 kW	RP MO	FIRME	DATA	
B	AGGIUNTA PRESA SCHUKO PER BARTSCHER	14.10.19	ROLDO						
A	MODIFICATO SIGLATURA SC	04.10.19	ROLDO						
TENSIONE	V	3N 400V AC 50 Hz 1N 230V AC 50Hz 3 230V AC 50Hz							
POTENZA	ΣP	ECE5232X(S) = 4,8 kW ECE52(S) = 6,3 kW ECE52X(S) = 7,7 kW				SE	DISEGNATO APPROVATO	BORTOT TESSER	30.03.17 09.09.20

Ci riserviamo a termini di legge, la proprietà di questo disegno con divieto di riprodurlo o di renderlo comunque noto a terzi senza la nostra esplicita autorizzazione scritta



Kombidämpfer Silversteam 5111M
Artikel-Nr.: 116726

Schaltplan
Datum 01.09.2022