

## Low-temperature cooker 1,2kW



- ▶ Drawers up to 3 x 1/1 GN or 600 x 400 mm
- ▶ Distance between the drawers: 80 mm
- ▶ COOK function
  - ✓ Low temperature cooking up to max. 110 °
- ▶ HOLD function
  - ✓ Holding at a precise temperature
- ▶ Core temperature sensor
- ▶ Bearing rails can be detached

### Description

Cooking and keeping warm in one – gentle preparation thanks to even heat that comes from all sides.

### Features

- Power load: 1,2 kW | 230 V | 50 Hz
- Temperature range: 30 °C to 110 °C
- Control unit: Electronic
- Number of drawers: 3
- Distance between trays: 80 mm
- Properties: Rounded baking chamber  
Pluggable  
Bearing rails can be detached
- Door hinge side can be changed: Yes
- Carrying handle: Yes
- Door hinge side: Left
- Temperature control: Stepless
- Digital display: Yes
- Format drawers: 1/1 GN  
600 x 400 mm
- Material: Stainless steel
- Important information: -

▶ Continue on the next page



## Low-temperature cooker 1,2kW

- Functions:
  - Low temperature cooking
  - HOLD function - for keeping warm at a precise temperature
  - COOK function - for low-temperature cooking up to max. 110 °C
- Control lamp:
  - Heat up
  - ON/OFF
  - Temperature
  - Core temperature
  - Steaming
  - Keeping warm
- Type of drawers:
  - Longitudinal
- Including:
  - 1 core temperature sensor
  - 1 pair of bearing rails for metal sheets 600 x 400
- Size:
  - W 505 x D 715 x H 415 mm
- Weight:
  - 42.2 kg



## Low-temperature cooker 1,2kW

### Add on Products

#### Grease drip container 600 x 400



- Bakery norm: 600 x 400 mm
- Material: Stainless steel
- Important information: -
- Size: W 605 x D 405 x H 45 mm
- Weight: 2.8 kg

Code-No. 525782  
GTIN 4015613658414

#### GN container, 1/1, D20



- Stackable: Yes
- Design: No perforation
- Reinforced edge: No
- Properties: -
- Surface: High-gloss
- Depth container: 20 mm
- Gastronorm: 1/1 GN

Code-No. A121025  
GTIN 4016098166722

#### GN container, 1/1, D40



- Content: 5 litre(s)
- Stackable: Yes
- Design: No perforation
- Reinforced edge: No
- Properties: -
- Surface: High-gloss
- Depth container: 40 mm

Code-No. A121040  
GTIN 4015613271064

#### GN container, 1/1, D65



- Content: 9 litre(s)
- Stackable: Yes
- Design: No perforation
- Reinforced edge: No
- Properties: -
- Surface: High-gloss
- Depth container: 65 mm

Code-No. A121065  
GTIN 4016098162755

## Low-temperature cooker 1,2kW

### Add on Products

#### Baking tray 600x400-AL



- Bakery norm: 600 x 400 mm
- Edge: 3 sides
- Silicone coating: No
- Material thickness: 1,5 mm
- Perforation: No
- Temperature resistant to: 260 °C
- Material: Aluminium

Code-No. 100412  
GTIN 4015613734699

#### Perforated tray 600x400-AL



- Diameter perforation: 3 mm
- Bakery norm: 600 x 400 mm
- Edge: 3 sides
- Silicone coating: No
- Material thickness: 1,5 mm
- Perforation: Yes
- Temperature resistant to: 260 °C

Code-No. 100413  
GTIN 4015613734705

#### Perforated tray 600x400-SI



- Diameter perforation: 3 mm
- Bakery norm: 600 x 400 mm
- Edge: 3 sides
- Silicone coating: Yes
- Material thickness: 1,5 mm
- Perforation: Yes
- Temperature resistant to: 260 °C

Code-No. 100416  
GTIN 4015613734712

#### Baking tray 1/1-AL




- Gastronorm: 1/1 GN
- Edge: 4 sides, cover
- Silicone coating: No
- Material thickness: 1,5 mm
- Perforation: No
- Temperature resistant to: 260 °C
- Material: Aluminium

Code-No. 100426  
GTIN 4015613734743

## Low-temperature cooker 1,2kW Add on Products


### Perforated tray 1/1-AL

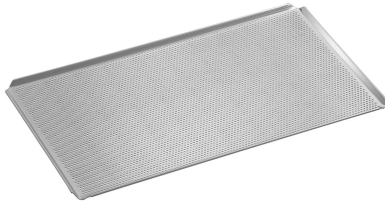

- Diameter perforation: 3 mm
- Gastronorm: 1/1 GN
- Silicone coating: No
- Material thickness: 1,5 mm
- Perforation: Yes
- Temperature resistant to: 260 °C
- Material: Aluminium

Code-No. 100427  
GTIN 4015613734750

### Perforated tray 1/1-SI

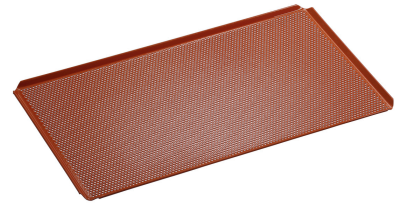

- Diameter perforation: 3 mm
- Important information: -
- Material: Aluminium
- Gastronorm: 1/1 GN
- Silicone coating: Yes
- Material thickness: 1,5 mm
- Perforation: Yes

Code-No. 100428  
GTIN 4015613734767