

## Combi steamer Silversteam 5230D



### Description

The Bartscher combi steamer from the Silversteam series has electronic controls and 5 shelves in GN 2/3 format – it's the ideal partner for every kitchen. Diverse meals can be prepared with different timing using the rack control function. Simple cooking with the Silversteam keeping an eye on everything for you.

### Features

- Power load: 3,3 kW | 230 V | 50 Hz
- Equipment connection: Pluggable
- Temperature range: 50 °C to 300 °C
- Control unit: Touch
- Functions: Circulating air  
Steam  
Combi-steaming  
Low temperature cooking  
Delta-T cooking  
Reversing motor direction (fan wheels)  
Steam production by means of direct injection
- Rack control: Yes
- Continuous operation: Yes
- Vapour extractor: Yes
- Core temperature sensor connection: Side
- USB connection: Side
- Fan speed: 3 levels

▶ Continue on the next page



▶ Up to 5 x 2/3 GN




▶ Rack control

- ✓ To enable the selection of a program for each shelf



▶ Electronic control with 600 programs (300 preinstalled, 300 programmable); up to 9 cooking phases per program

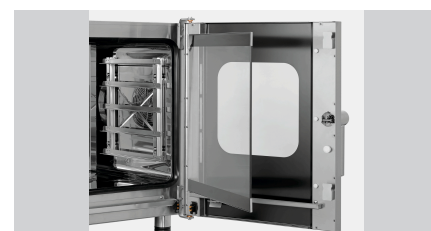

▶ Double door glazing, inner door can be opened easily for cleaning

▶ Vapour extractor is easy to regulate

## Combi steamer Silversteam 5230D



• Type of drawers:	Crosswise
• Number of drawers:	5
• Distance between trays:	74 mm
• Water connection:	3/4"
• Time adjustment:	0 to 599 minutes
• Number of fans:	1
• Properties:	Rounded baking chamber Bearing rails can be detached Double-winged door pane LED lighting in door Pluggable
• LED display:	Steaming Delta-T cooking Cooking phases Core temperature Fan speed Program Temperature Time
• Available on request:	-
• Control lamp:	-
• Series:	Silversteam
• Temperature control:	Stepless
• Interior lighting:	Yes
• Format drawers:	2/3 GN
• Operating mode:	Electro
• With cleaning system:	No
• Material:	CNS 18/10
• Important information:	From a water hardness of 5° dH upwards, we urgently recommend fitting a suitable water softener and a water pressure of maximum 3 bar
• Material cooking chamber:	CNS 18/10
• Including:	1 grid 2/3 GN 1 tray 2/3 GN 1 water supply hose
• Number of cooking phases:	9
• Number of cooking programs:	300 pre-installed programs 300 configurable programs
• Size:	W 620 x D 775 x H 675 mm
• Weight:	58.6 kg

## Combi steamer Silversteam 5230D

### Add on Products

#### Base unit Silversteam 230

CNS



- Material: Chrome-nickel steel
- Designed for: 2/3 GN combi-steamers Silversteam2 series  
2/3 GN combi-steamers Silversteam series
- Important information: -
- Colour: Silver
- Base shelf: Yes
- Height-adjustable feet: No

Code-No. 115075  
GTIN 4015613610641

#### Core temperature sensor set 1KA

STAINLESS  
STEEL



- Designed for: Combi steamers series Silversteam
- Material temperature sensor: Stainless steel
- Important information: -
- Number of measuring points: 1
- Length cable: 1,8 m
- Set comprises: 1 core temperature sensor  
1 holder

Code-No. 116009  
GTIN 4015613595139

#### Pump set f. combi steamer



- Material: Plastic  
Metal
- Important information: -

Code-No. 116011  
GTIN 4015613595146

#### GN container, 2/3, D65

CNS  
18/10



- Content: 5,5 litre(s)
- Stackable: Yes
- Design: No perforation
- Reinforced edge: No
- Properties: -
- Surface: High-gloss
- Depth container: 65 mm

Code-No. A125065  
GTIN 4015613271217

## Combi steamer Silversteam 5230D

### Add on Products

#### GN container, 2/3, D100

CNS  
18/10



- Content: 9 litre(s)
- Stackable: Yes
- Design: No perforation
- Reinforced edge: No
- Properties: -
- Surface: High-gloss
- Depth container: 100 mm

Code-No. A125100  
GTIN 4015613271224

#### GN container, 2/3, D65, perforated

CNS  
18/10



- Content: 5,5 litre(s)
- Stackable: Yes
- Design: With perforation (holes)
- Reinforced edge: No
- Properties: -
- Surface: High-gloss
- Depth container: 65 mm

Code-No. A103065  
GTIN 4015613278940

#### Power cleaner F1L



- Order quantity unit: 1 box (6 bottles)
- Content: 6 x 1 litre
- Model: Liquid
- HACCP compliant: Yes
- Chlorine-free: Yes
- Phosphate-free: Yes

Code-No. 173278  
GTIN 4015613773346

#### Intensive power cleaner F1L



- Order quantity unit: 1 box (6 bottles)
- Content: 6 x 1 litre
- Model: Liquid
- HACCP compliant: Yes
- Chlorine-free: Yes
- Phosphate-free: Yes

Code-No. 173280  
GTIN 4015613773353

## Combi steamer Silversteam 5230D

### Add on Products

#### Hand shower f. combi steamer



- Length hose: 2 m
- Properties: Shutoff valve for fixed connection to water supply 1/2"
- Including: 1 holder
- Important information: -
- Water connection: 1/2"

Code-No. 116005  
GTIN 4015613587189

#### Smoker-Box 1160



- Material: Stainless steel
- Model: With heating coil
- Designed for: Combined steamer
- Important information: Maximum smoking temperature: 200 °C
- Comprising: Mains adapter  
Smoker-Box
- Volume: 1,16 litre(s)

Code-No. 117712  
GTIN 401561379195

#### Combi steamer cleaner RS-5L



- Order quantity unit: 1 canister
- Designed for: Combi steamers with an automatic dosing system
- Ph level: 14
- HACCP compliant: No
- Chlorine-free: Yes
- Phosphate-free: No

Code-No. 116299V  
GTIN 4015613813042

#### Perforated tray 2/3-AL



- Diameter perforation: 3 mm
- Gastronorm: 2/3 GN
- Edge: 4 sides, cover
- Silicone coating: No
- Material thickness: 1,5 mm
- Perforation: Yes
- Temperature resistant to: 260 °C

Code-No. 100417  
GTIN 4015613734729

## Combi steamer Silversteam 5230D

### Add on Products

#### Perforated tray 2/3-SI



- Diameter perforation: 3 mm
- Gastronorm: 2/3 GN
- Edge: 4 sides, cover
- Silicone coating: Yes
- Material thickness: 1,5 mm
- Perforation: Yes
- Temperature resistant to: 260 °C

Code-No. 100425  
GTIN 4015613734736

#### Oven gloves 420



- Properties: With flame protection  
With hanger  
Fabric density: 640 g/m<sup>2</sup>
- Material: Cotton 100 % (exterior)
- Colour: Black
- Important information: Do not wash to maintain flame protection
- Can be washed: No

Code-No. A500512  
GTIN 4015613735481

#### Pressure regulator



- Material: Brass  
Chrome-plated
- Important information: -
- Water pressure: 1 - 6 bar (preset to 3 bar)
- Connection: 3/4"
- Operating temperature max.: 65 °C
- Incoming pressure max.: 16 bar

Code-No. 533051  
GTIN 4015613468617