


Induction cooker IK 20TC




► Output: 2 kW

► Material hob: Glass

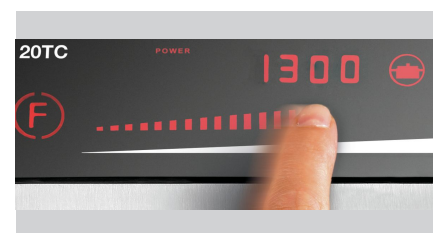

► Slide function

✓ Easy regulation of time, output and temperature

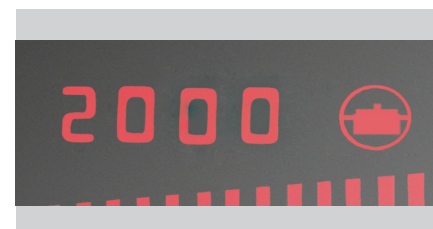

► Pot recognition

Description

Easy operation for efficient working - time, output and temperature can be set via the slide function.

Features

• Temperature range:	60 °C to 240 °C
• Number of temperature levels:	8
• Power load:	2 kW 230 V 50 Hz
• Equipment connection:	Pluggable
• Control unit:	Electronic
	Touch with slide function
• Number of hobs:	1
• Type of hobs:	Induction
• Control lamp:	ON/OFF
• Overheating protection:	Yes
• Digital display:	Yes
• ON/OFF switch:	Yes
• Pot recognition:	Yes
• Number of output levels:	8
• Properties:	-
• Material hob:	Glass
• Regulation of:	Output

► Continue on the next page



Induction cooker IK 20TC

- | | |
|-----------------------------------|-------------------------|
| • Regulation of: | Temperature |
| • Material: | Time |
| | Stainless steel |
| | Glass |
| • Important information: | - |
| • Output hob(s) max.: | 2000 W |
| • Colour: | Silver |
| | Black |
| • Time adjustment: | 5 to 180 minutes |
| • Diameter hob(s): | 228 mm |
| • Size cerane surface: | W 285 x D 345 mm |
| • Can be installed: | No |
| • Lock button (child protection): | Yes |
| • Core temperature sensor: | No |
| • Size: | W 330 x D 400 x H 63 mm |
| • Weight: | 3.4 kg |



Induction cooker IK 20TC

Add on Products

Power cleaner F1L, set of 2



- Designed for: Stubborn dirt, especially in kitchens
Grill and combi steamer cleaning (without cleaning system)
- Content: 2 x 1 litre
- Model: Liquid
High concentrate
- Ph level: 13,5

Code-No. 173078
GTIN 4015613731926